

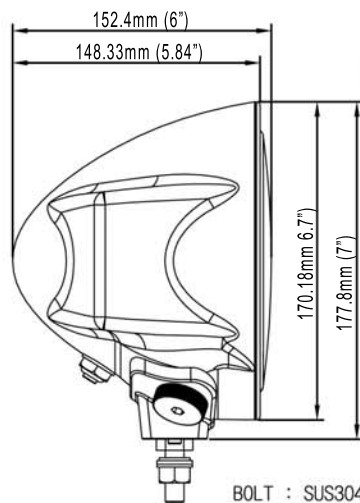
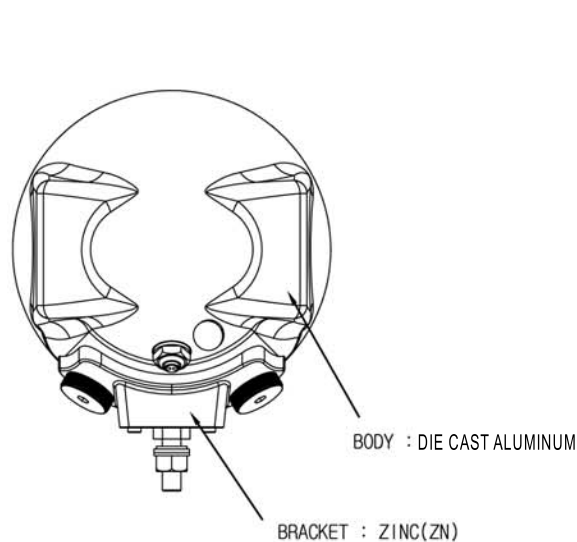


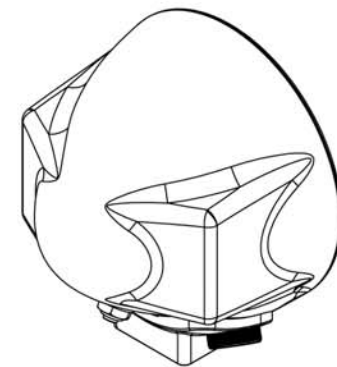

BOLT : SUS304 M10*40
NUT : SUS304 M10
SPRING-WASHER/NYLON
WASHER : SUS304 M10*21

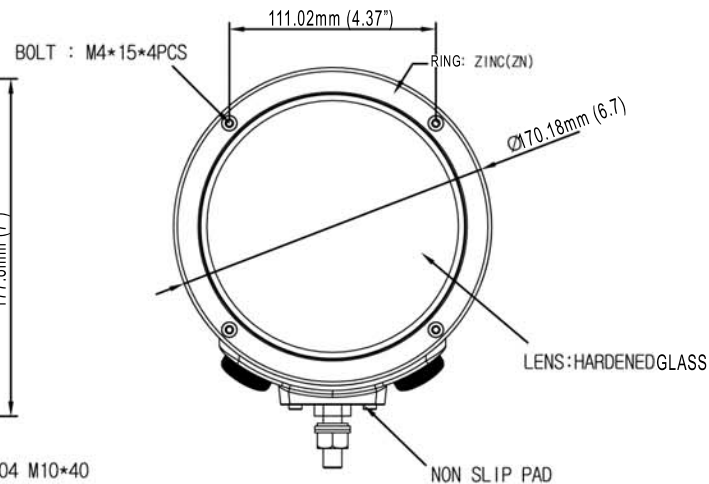

INJECTION BOLT : ABS BLACK / M8 BOLT

AIR CAP : ABS BLACK
HOLDER : ABS BLACK

POWER LEAD WIRE : AVSS 2.0 (AWG #12)
-POSITIVE: RED
-GROUND: BLACK

PROTECTIVE TUBE: POLYVINYL Ø6mm (.24")

HOUSING : MG610320 KET
TERMINAL : ST730496-3 KET
WIRE SEAL : MG680451 KET
REAL HOLDER : MG630496-3 KET

Vision
Global Lighting Systems
visionxusa.com

SPECIFICATION

1. OPERATING VOLTAGE : 9-32 VOLT DC
2. BALLAST : 35 WATT HID
3. LAMP : 35W / 5000K ± 500
4. REFLECTOR : PRESS / VACUUM METALIZED
5. LENS : HARDENED GLASS
6. WEIGHT: 2.25Kg (4.96lbs)
7. VIBRATION : 8.6GRMS
8. WEATHER PROOF & DUST RESISTANT
9. TEMPERATURE : -40°C ~ 85°C
10. LIFE : 2,000Hrs
11. IP RATING : IP65

UNIT	mm	DRAWING	CHECK	APPROVAL	TITLE	6500
SCALE	N/S					
DATA	2008.06.13					
[VX] Vision X					DRAWING NAME	VX-TS-6500