


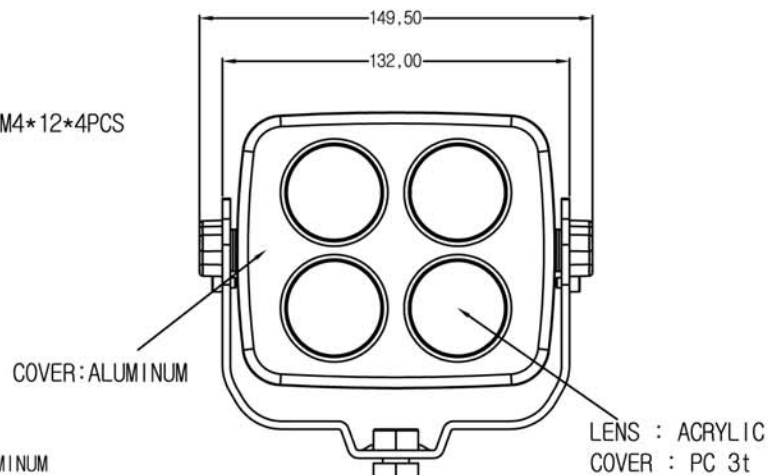


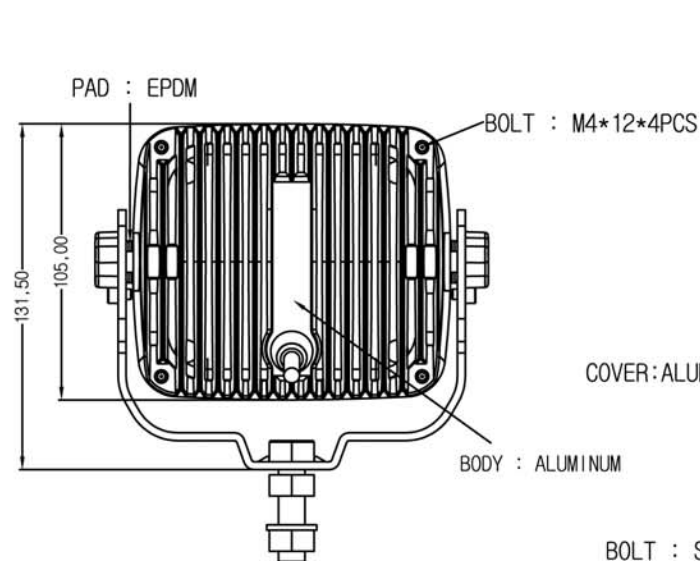

BOLT : SUS304 M10*40 NYLON
NUT : SUS304 M10
WASHER : SUS304 M10*21

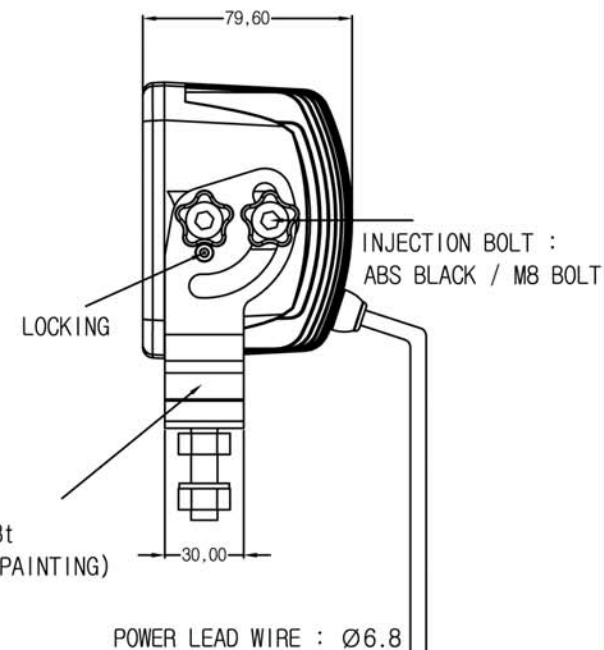

TUBE : Ø15*60

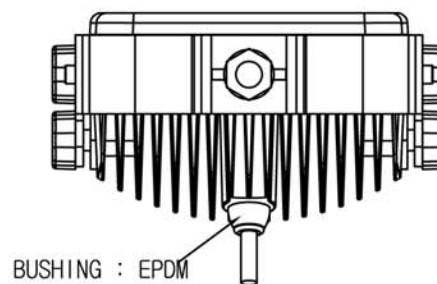

SPECIFICATION

- 1.OPERATING VOLTAGE : DC 9.0V~50V
- 2.WATTAGE : 40W
- 3.LED : 10W (SEOUL SEMICONDUCTOR)
- 4.LUMINOUS FLUX : 900*4 lm
- 5.LENS : ACRYLIC
- 6.WEGHT : 1.4Kg
- 7.VIBRATION : 8.6Grms
- 8.WEALTH PROOF & DUST RESISTANCE
- 9.TERPERATURE : -40℃~85℃
- 10.LIFE : 50,000Hr
- 11.IP RATING : IP68

Vision
Global Lighting Systems
RECEPTACLE : 0104-2P-E004
ENVIRONMENTAL : 1060-16-0122
WEDGE : W2P

S4100

[VX] Vision X

VX_TS_XIL-S4100