


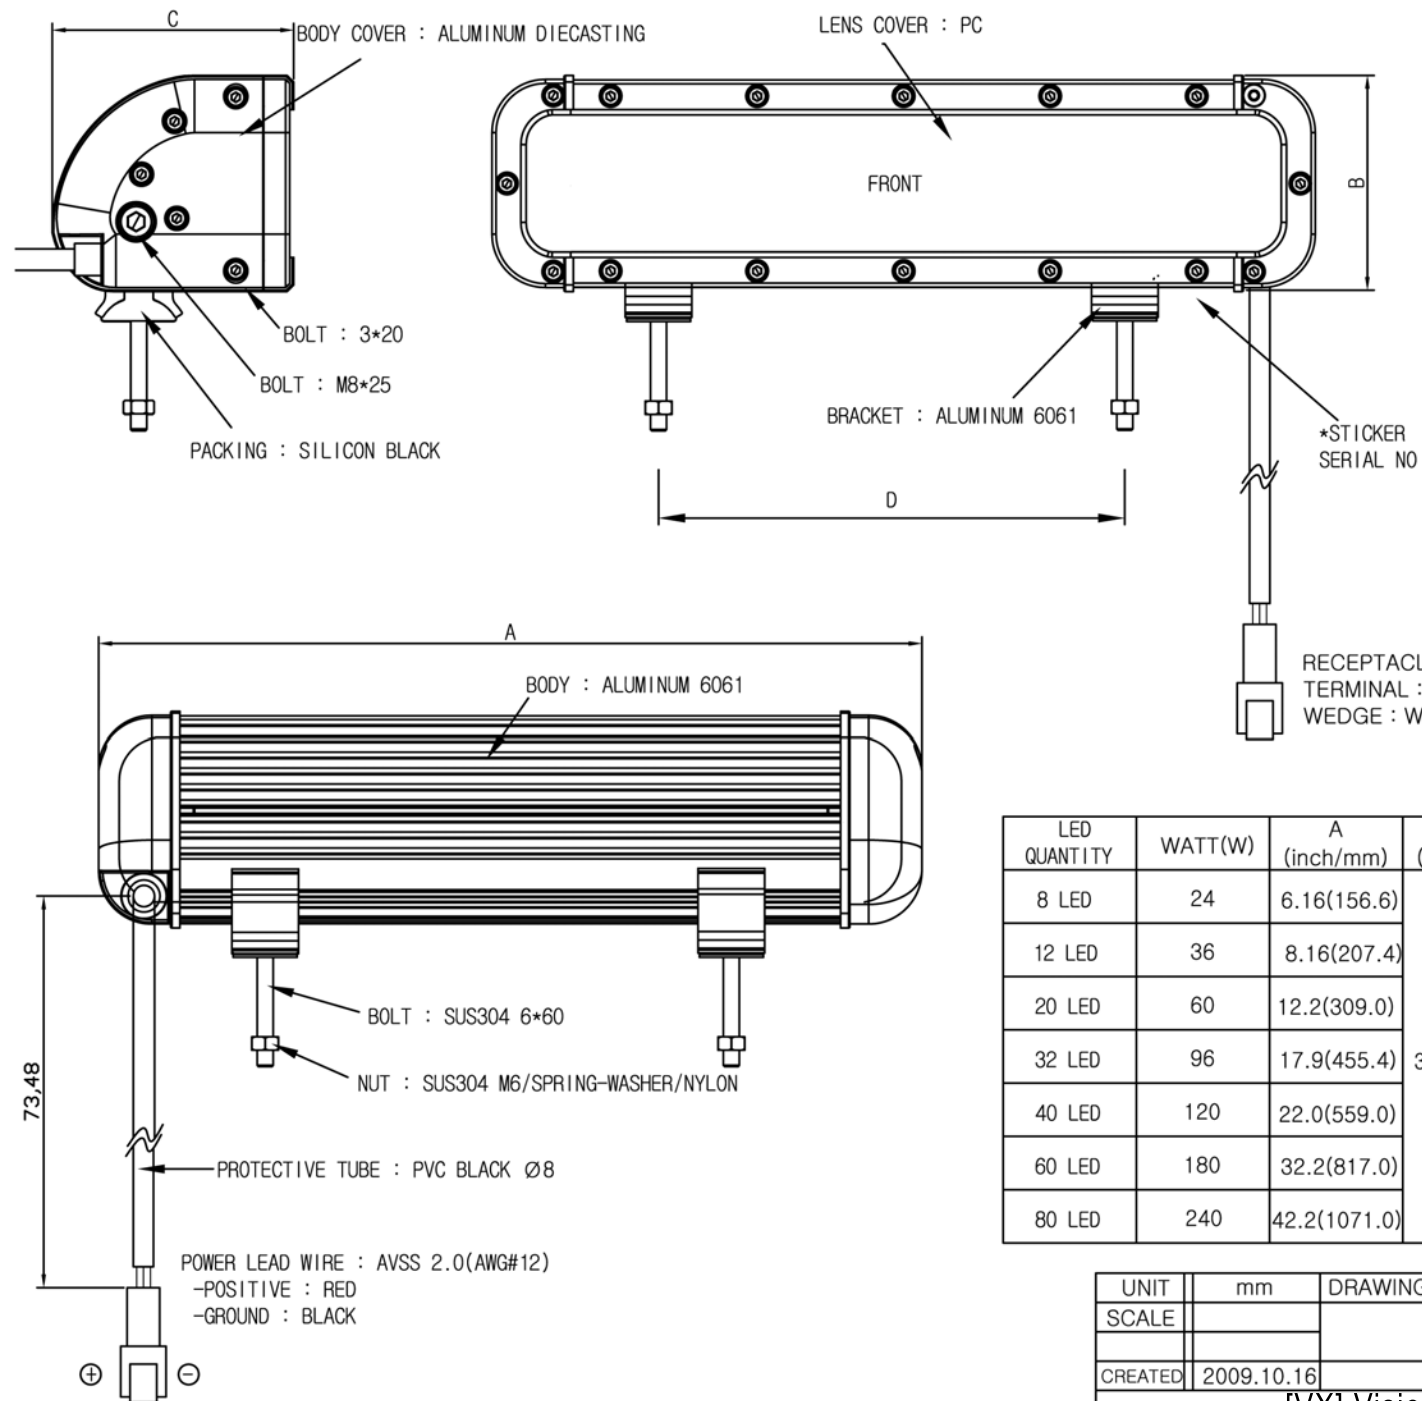

*SPECIFICATION

- 1.OPERATING VOLTAGE : DC 11.0V~32.0V
- 2.WATT : 12V / 4.4A / 52.0W
24V / 2.2A / 53.3W
- 3.REFLECTOR : PC / VACUUM METALLIZED
- 4.LENS : ACRYLIC
- 5.VIBRATION : 8.6G_{RMS}
- 6.WEATHER PROOF &DUST RESISTANCE
- 7.TEMPERATURE : -40℃~50℃
- 8.LIFE : 50,000Hrs
- 9.IP RATING : IP68
- 10.TENSILE STRENGTH: THE WIRES CAN WITHSTAND ABOUT 15kg PULL FOR 3SEC.

RECEPTACLE : DT04 - 2P - E004
TERMINAL : 1060 - 6 - 0122
WEDGE : W2P

LED QUANTITY	WATT(W)	A (inch/mm)	B (inch/mm)	C (inch/mm)	D (inch/mm)	BRACKET (PCS)	WEGHT (Kg)
8 LED	24	6.16(156.6)	3.19 (81.1)	3.57(90.59)	1.57(40)	2	1.95
12 LED	36	8.16(207.4)			2.32(59)		2.35
20 LED	60	12.2(309.0)			4.92(125)		3.20
32 LED	96	17.9(455.4)			5.47(139)	3	4.70
40 LED	120	22.0(559.0)	3.19 (81.1)	3.57(90.59)	5.0(127)	4	5.50
60 LED	180	32.2(817.0)			8.35(212)		7.65
80 LED	240	42.2(1071.0)			11.65(296)		10.35

UNIT	mm	DRAWING	CHECK	APPROVAL	SINGLE STACK XMITTER ELITE LED LIGHT BAR VX-TS-XMITTER ELITE
SCALE					
CREATED	2009.10.16				
[VX] Vision X					